

**AQA**

**A Level**

# A Level Physics

ELECTRICAL CIRCUITS: Electrical  
Quantities

Name:



Mathsmadeeasy.co.uk

Total Marks: /30

1. This question is about the variation of quantities such as current, voltage and resistance in simple electrical circuits containing a variety of standard components.

Total for Question 1: 11

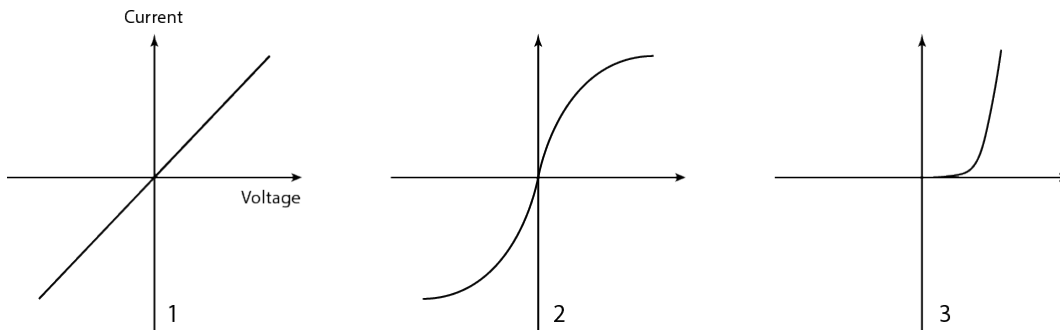


Figure 1: I-V characteristics for three different circuit components.

- (a) State Ohm's Law. [1]
- (b) Assign one of the following components to each of the characteristic graphs in Figure 1: filament lamp, semiconductor diode, resistor. [3]
- (c) Why have these been plotted on graphs of current against potential difference rather than current against electromotive force? [1]
- (d) For the diode, state the value of the resistance when a backward bias is applied. [1]

- (e) Sketch the following graphs: [2]
- Resistance against temperature for an ntc thermistor.
  - Current against voltage for an ntc thermistor.

- (f) The current in a filament is 8 A. In the time during which Patrick is using the lamp,  $8 \times 10^{22}$  electrons pass through a given point in the circuit. For how long has he been using the lamp? [3]

[www.megalecture.com](http://www.megalecture.com)



2. James unexpectedly finds an electrical circuit in his physics classroom. Immediately he starts recording the current. He notes that it decreases linearly from 10 A to zero over a time period of 30 s.

Total for Question 2: 5

(a) Plot a graph of current against time.

[2]

(b) Calculate the charge that is transferred in this time.

[2]

(c) If James had also been able to record a graph of charge (vertical axis) against time (horizontal axis), which of the following accurately describes what he would have seen?

[1]

- i. Linear increase.
- ii. Non-linear increase.
- iii. Linear decrease.

3. Frances is exploring the electrical properties of a piece of wire. She observes that:
- (a) for a given current, doubling the length,  $L$ , of the wire doubles the potential difference (P.D.) and the resistance,  $R$ .
  - (b) for a given P.D., doubling the wire's diameter,  $d$ , causes  $R$  to decrease by a factor of 4.

Total for Question 3: 11

- (a) On the basis of Frances' observations, which of these relationships is true: [3]
- i.  $R \propto A$  and  $R \propto L$
  - ii.  $R \propto 1/A$  and  $R \propto 1/L$
  - iii.  $R \propto 1/A$  and  $R \propto L$
  - iv.  $R \propto d^2$  and  $R \propto L$

- (b) Use this to define resistivity,  $\rho$ , in terms of  $d$ ,  $R$  and  $L$ . [2]

- (c) Figure 2 is a characteristic graph for a circuit component. Calculate the resistivity at the point for which the curves tangent has been drawn given that the component is cylindrical, has a length of 8 cm and has a radius of  $1.5 \times 10^{-5}$  m. [3]

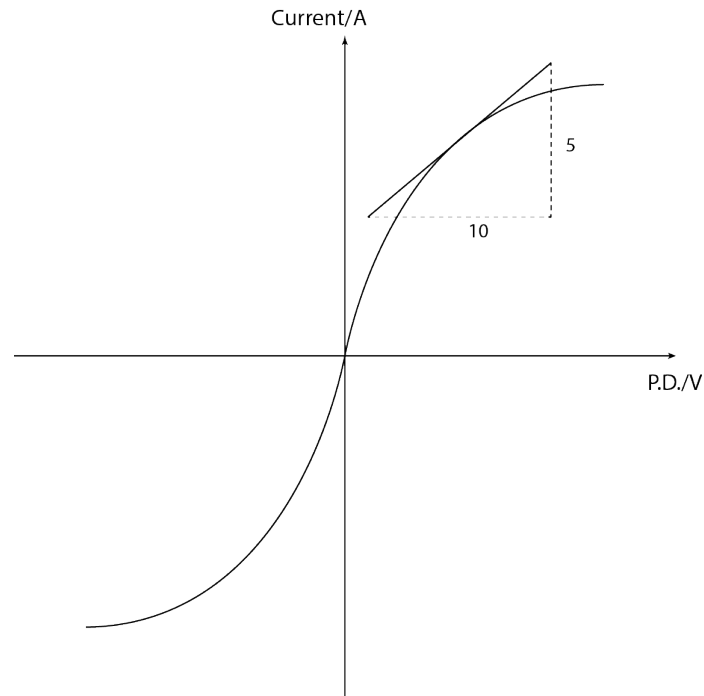


Figure 2: Characteristic graph for a particular circuit component.

- (d) Explain how, using the characteristic, it is possible to deduce that, for this component, resistivity increases with temperature. [3]

4. This question is about superconductors.

Total for Question 4: 3

(a) A superconductor is a material whose resistance...

[1]

- i. ... increases to  $\infty$  below a specific critical temperature.
- ii. ... decreases to zero above a specific critical temperature.
- iii. ... decreases to zero below a specific critical temperature.

(b) At present the highest known critical temperature is approximately  $-130^{\circ}\text{C}$ . Give two examples that illustrate why a superconductor with a room temperature critical temperature would be particularly useful.

[2]

[www.megalecture.com](http://www.megalecture.com)