

FORMULA SHEET

PHYSICS

2017

AVERAGE SPEED

- $v_{av} = \frac{\text{total distance}}{\text{total time}}$
- $v_{av} = \frac{s_1 + s_2}{t_1 + t_2}$
- $v_{av} = \frac{v_1 + v_2}{2}$ (if $t_1 = t_2$)
- $v_{av} = \frac{2v_1 v_2}{v_1 + v_2}$ (if $s_1 = s_2$)

Instantaneous velocity

$v_{inst} = \lim_{\Delta t \rightarrow 0} \frac{\Delta d}{\Delta t}$

Instantaneous Acc.

$a_{inst} = \lim_{\Delta t \rightarrow 0} \frac{\Delta v}{\Delta t}$

Force $F = ma = \frac{\Delta p}{\Delta t}$

Momentum

$p = mv = \sqrt{2mk \cdot E} = \sqrt{2mve}$
 $p = 2k \frac{E}{v}$

Impulse $I = \Delta p = F \times t$

Law of cons. of Mom.

$m_1 v_1 + m_2 v_2 = m_1 v_1' + m_2 v_2'$

Force due to water flow

$F = \frac{\rho}{\tau} v = \rho \frac{V}{t} v = \rho A v^2$

Projectile Motion

$H = \frac{v_i^2 \sin^2 \theta}{2g} = \frac{T^2 g}{8}$

$T = \frac{2v_i \sin \theta}{g}$ (if $4H = R \tan \theta$, $R_{max} = 4H$)

$R = \frac{v_i^2 \sin 2\theta}{g} = R_{max} \sin 2\theta$

$R_{max} = \frac{v_i^2}{g}$ (if $\theta = 45^\circ$)

$\vec{v}_f = \vec{v}_{fx} + \vec{v}_{fy}$


$v_{fx} = v_i \cos \theta$

$v_{fy} = v_i \sin \theta - gt$

Torque

$\vec{\tau} = \vec{r} \times \vec{F} = rF \sin \theta$
 $\tau = I\alpha = mA^2 \alpha$
 $\tau = \frac{\Delta L}{\Delta t}$

Couple



Work

$W = \vec{F} \cdot \vec{d} = Fd \cos \theta$
 $W = \int \vec{F} \cdot d\vec{s}$
 $W = mgh = \frac{1}{2} kx^2$
 $W = \Delta V_a = \frac{1}{2} F \Delta l$

Energy

$P \cdot E = mgh = \frac{GMm}{r}$
 $P \cdot E = \frac{1}{2} kx^2$
 $P \cdot E = \Delta V_a$
 $K \cdot E = \frac{1}{2} mv^2 = \frac{p^2}{2m} = \frac{p v}{2}$
 $K \cdot E = \frac{1}{2} m r^2 \omega^2 = \frac{1}{2} I \omega^2$

Power

$P = \frac{W}{t} = \vec{F} \cdot \vec{v}$
 $P = VI = I^2 R = V^2/R$
 $P = \tau \omega$

Angular Displacement θ

$\theta = s/r$

Angular velocity ω

$\omega = \frac{\Delta \theta}{\Delta t} = \frac{v_t}{r} = \frac{2\pi}{T} = 2\pi f$

Angular acceleration α

$\alpha = \frac{\Delta \omega}{\Delta t} = \frac{a_t}{r} = \frac{I}{I}$

Tangential velocity

$v_t = r\omega$, $\vec{v}_t = \vec{\omega} \times \vec{r}$

Tangential acceleration

$a_t = r\alpha$, $\vec{a}_t = \vec{\alpha} \times \vec{r}$

Centripetal force

$F_c = \frac{mv^2}{r} = m\omega^2 r = \frac{4\pi^2 m r}{T^2}$

Centripetal acceleration

$a_c = \frac{v^2}{r} = \omega^2 r = \frac{4\pi^2 r}{T^2}$

Gravitational orbits

$r = \left[\frac{GM T^2}{4\pi^2} \right]^{1/3}$, $\left\{ \begin{array}{l} r^3 \propto T^2 \\ T \propto r^{3/2} \end{array} \right.$

Instantaneous disp.

$x = x_0 \sin \theta$ (w.r.t mean)
 $= x_0 \sin \omega t$
 $x = x_0 \cos \theta$ (w.r.t extreme)
 $= x_0 \cos \omega t$

Velocity

$v = v_0 \cos \theta$
 $v = v_0 \sqrt{1 - \frac{x^2}{x_0^2}}$
 $v = \omega \sqrt{x_0^2 - x^2}$
 $v_{max} = \omega x_0$
 $v_0 = x_0 \omega$
 $v_0 = x_0 \frac{2\pi}{T}$
 $v_0 = 2\pi \frac{x_0}{T}$

Acceleration

$a = -a_0 \sin \theta$
 $a = -\omega^2 x$
 $a = \left(\frac{2\pi}{T} \right)^2 x$
 $a_{max} = \omega^2 x_0$
 $x = x_0$
 $a_0 = -\omega^2 x_0$

Mass Spring System

$\omega = \sqrt{k/m}$, $T = 2\pi \sqrt{\frac{m}{k}}$
 $f = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$, $k = \frac{F}{x} = \frac{mg}{x}$
 $T = 2\pi \sqrt{\frac{x}{g}}$ (vertical spring)

Simple pendulum

$T = 2\pi \sqrt{\frac{l}{g}}$, $\omega = \sqrt{\frac{g}{l}}$
 $f = \frac{1}{2\pi} \sqrt{\frac{g}{l}}$

If $T = \text{const.} \Rightarrow l \propto g$

Energy Cons. in SHM

$P \cdot E = \frac{1}{2} kx^2$
 $K \cdot E = \frac{1}{2} k(x_0^2 - x^2)$
 $= \frac{1}{2} kx_0^2 \left(1 - \frac{x^2}{x_0^2} \right)$
 $T \cdot E = P \cdot E_{max} = K \cdot E_{max} = \frac{1}{2} kx_0^2$

Speed of wave

$v = f\lambda \Rightarrow f = \frac{v}{\lambda} \Rightarrow \lambda = \frac{v}{f}$
 $v = \sqrt{\frac{F}{\mu}}$ (transverse waves in string)
 $v = \sqrt{\frac{E}{\rho}}$ (longitudinal waves)

Stationary waves

$f_1 = \frac{v}{2l}$ (fundamental)
 $f_n = n f_1$, $\lambda_n = \frac{2l}{n}$, $n = 1, 2, 3, \dots$
 $f_1 = \frac{v}{4l}$ (closed pipe)
 $f_n = n f_1$, $\lambda_n = \frac{4l}{n}$, $n = 1, 3, 5, \dots$
 $n = 2n - 1$ (odd)

$f_c = \frac{f_0}{2}$ (only for fundamental frequency of two pipes)

Doppler's Effect

$f' = \left(\frac{v + u_o}{v} \right) f$ (observer moving towards source)
 $f' = \left(\frac{v - u_o}{v} \right) f$ (observer moving away from source)
 $f' = \left(\frac{v}{v - u_s} \right) f$ (source moving towards observer)
 $f' = \left(\frac{v}{v + u_s} \right) f$ (source moving away from observer)

$f' = \left(\frac{v + u_o}{v \pm u_s} \right) f$ (when both observer & source are moving)

Specific heat $c = \frac{Q}{m\Delta T}$

Latent heat $L = \frac{Q}{m}$

Young's DSE

Path diff: $m\lambda = d \sin \theta$ (B)
 $(m + \frac{1}{2})\lambda = d \sin \theta$ (D)
 Fraunhofer diff. (parallel): $y_m = m \frac{\lambda L}{d}$
 $y_{m+1/2} = (m + \frac{1}{2}) \frac{\lambda L}{d}$

Fringe Spacing $\Delta y = \frac{\lambda L}{d}$ (width/height)

Diffraction Grating: $m\lambda = d \sin \theta$
 $n\lambda = \frac{n \sin \theta}{N}$ (where $d = \frac{1}{N}$)

By Prof. A.

Strain Energy

$$U = \frac{1}{2} F \Delta l = \frac{1}{2} \sigma \cdot E A \Delta l$$

$$U = \frac{1}{2} Y \frac{\Delta l^3}{l^2} A$$

$$U = \frac{1}{2} \frac{F^2 l}{A Y}$$

Strain energy density u

$$u = \frac{U}{Vol} = \frac{1}{2} \sigma \epsilon$$

$$u = \frac{1}{2} Y \epsilon^2 = \frac{1}{2} \frac{\sigma^2}{Y}$$

OR as investing amp.

$$G = -R_2/R_1$$

OP. as non-investing amp.

$$G = 1 + R_2/R_1$$

Transistor as an amp.

$$\Delta v = -\beta \frac{V_o}{V_e}, \beta = \frac{I_c}{I_B}$$

$$I_E = I_c + I_B$$

Energy of Photon

$$E = hf = \frac{hc}{\lambda} = mc^2 = \rho c$$

Photoelectric Effect

$$hf = \phi + K \cdot E \quad \phi = hf_o$$

$$hf = \phi + eV$$

de. Broglie Hypothesis

$$\lambda = \frac{h}{p} = \frac{h}{mv} = \frac{h}{\sqrt{2mK \cdot E}}$$

$$= \frac{h}{\sqrt{2mve}} = \frac{h}{\sqrt{3mkT}}$$

Hydrogen Emission Spectrum

$$\frac{1}{\lambda} = R_H \left(\frac{1}{p^2} - \frac{1}{n^2} \right)$$

Bohr's Atomic Model

$$E_n - E_p = hf = \frac{hc}{\lambda}$$

Angular momentum

$$L = n \frac{h}{2\pi} = mvr_n$$

Quantized radius r_n

$$r_n = \frac{n^2 h^2}{4\pi^2 k e^2 m} = 0.53 A n^2$$

Quantized energy E_n

$$E_n = -\frac{2\pi^2 k^2 e^4 m}{n^2 h^2} = -\frac{E_o}{n^2}$$

$$E_n = -\frac{13.6 \text{ eV}}{n^2}$$

Continuous X-rays


$$eV = hf = \frac{hc}{\lambda} = K \cdot E_e$$

$$f = \frac{eV}{h} = (2.4 \times 10^{15}) V$$


$$\lambda = \frac{hc}{eV} = \frac{(1240 \times 10^{-9})}{V}$$

$$V_e = \sqrt{\frac{2eV}{m}} = (6 \times 10^5) \sqrt{V}$$


Law of α -decay



Law of β -decay



Law of γ -decay



Half-life

$$T_{1/2} = \frac{\ln 2}{\lambda} = \frac{0.693}{\lambda}$$

$$\frac{\Delta N}{\Delta t} = -\lambda N$$

$$N_t = e^{-\lambda t} N_o$$

Mass defect

$$\Delta m = m_{\text{nucleons}} - m_{\text{nuclous}}$$

$$= (Zm_p + Nm_n) - m$$

Binding Energy

$$B \cdot E = \Delta m c^2 = \Delta m \cdot 931 \text{ MeV}$$

Energy stored in inductor

$$U = \frac{1}{2} LI^2 = \frac{1}{2} N \Phi I$$

$$= \frac{1}{2} \frac{B^2 \Delta l}{\mu_o}$$

Geostationary Orbits

$$T = 42.3 \times 10^4 \text{ m}$$

$$h = 36 \times 10^6 \text{ m (altitude of sat)}$$

$$v = 3.1 \times 10^3 \text{ m s}^{-1}$$

$$T = 24 \text{ hrs}$$

Second Pendulum

$$T = 2\pi, f = 0.5 \text{ Hz}$$

length \propto value of g

Speed of Sound

$$\text{at } 0^\circ \Rightarrow v_o = 332 \text{ m s}^{-1}$$

Specific Heat

$$C_{\text{water}} = 4200 \text{ J kg}^{-1} \text{ K}^{-1}$$

$$C_{\text{ice}} = 2100 \text{ J kg}^{-1} \text{ K}^{-1}$$

$$C_{\text{steam}} = 2010 \text{ J kg}^{-1} \text{ K}^{-1}$$

Latent Heat

$$L_{\text{fusion of H}_2\text{O}} = 336,000 \text{ J kg}^{-1}$$

$$L_{\text{vap. of H}_2\text{O}} = 2,260,000 \text{ J kg}^{-1}$$

Molar specific Heat

$$Y_{\text{monatomic}} = \frac{5}{2} = 1.67$$

$$Y_{\text{diatomic}} = \frac{7}{5} = 1.4$$

$$Y_{\text{polyatomic}} = \frac{9}{7} = 1.29$$

Refractive Index

$$n_{\text{air}} = 1$$

$$n_{\text{water}} = 1.33 = 4/3$$

$$n_{\text{glass}} = 1.5 = 3/2$$

Critical angle

$$\text{for glass } \angle c = 41^\circ$$

$$\text{for water } \angle c = 49^\circ$$

$$\text{for air } \angle c = 90^\circ$$

Diffraction Grating

$$N = 400 - 5000 \text{ lines/cm}$$

Universal Gas Const.

$$R = 8.314 \text{ J mol}^{-1} \text{ K}^{-1}$$

Boltzmann's const. K

$$K = 1.38 \times 10^{-23} \text{ J K}^{-1}$$

Avogadro's NO. (NA)

$$N_A = 6.02 \times 10^{23} \text{ mol}^{-1}$$

Temperature conversion

$$\frac{T_c}{100} = \frac{T_F - 32}{180} = \frac{T_K}{273.15}$$

$$\Delta T_c = \Delta T_K$$

$$\Delta T_F = \frac{9}{5} \Delta T_c = \frac{9}{5} \Delta T_K$$

$$\Delta T_F = 1.8 \Delta T_c = 1.8 \Delta T_K$$

Coulomb's Const.

$$K = 9 \times 10^9 \text{ N m}^2 / \text{C}^2$$

Permeability of free space

$$\mu_o = 4\pi \times 10^{-7} \frac{\text{Wb}}{\text{Am}}$$

Planck's Const.

$$h = 6.63 \times 10^{-34} \text{ J s}$$

Rydberg's Const.

$$R_H = 1.09 \times 10^7 \text{ m}^{-1}$$

Gravitational const.

$$G = 6.67 \times 10^{-11} \text{ Nm}^2 \text{ kg}^{-2}$$

Distance covered by body in n^{th} second

$$S_n = V_i t + \frac{a}{2} (2n-1)$$

Capacitors in series

$$\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots$$

$$C_{min} = C/n$$

Capacitors in Parallel

$$C_{eq} = C_1 + C_2 + C_3 + \dots$$

Resistors in series

$$R_{eq} = R_1 + R_2 + R_3 + \dots$$

Resistors in Parallel

$$\frac{1}{R_{eq}} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$$

$$R_{min} = R/n$$


Springs in Parallel

$$k_{eq} = k_1 + k_2 + k_3 + \dots$$

Springs in series

$$\frac{1}{k_{eq}} = \frac{1}{k_1} + \frac{1}{k_2} + \frac{1}{k_3} + \dots$$

Flat R.H.R



I in conductor @ charge

R_{eq} across ends of Δ

$$R_{eq} = \frac{2}{3} R$$

Resistance of wire which is stretched n times of original length


$$R' = n^2 R$$

Accelerated frame of ref.

$$T = 2\pi \sqrt{\frac{L}{g+a}} \Rightarrow \uparrow a$$



$$T = 2\pi \sqrt{\frac{L}{g-a}} \Rightarrow \downarrow a$$

Half-wave Rectification

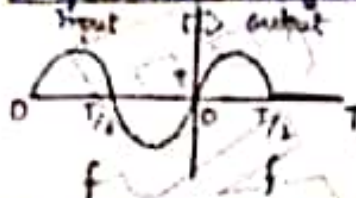


Variation in the value of g


i) Height iii) Depth




SHM

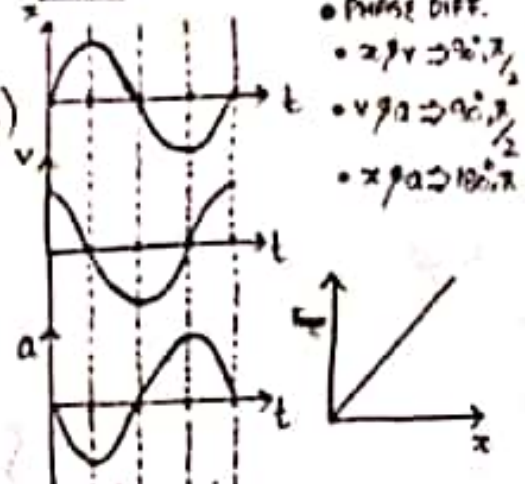


Full-wave Rectification

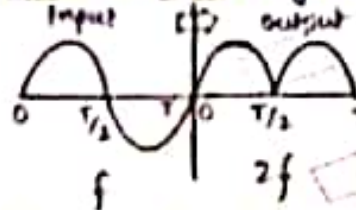

Diffraction pattern of monochromatic light

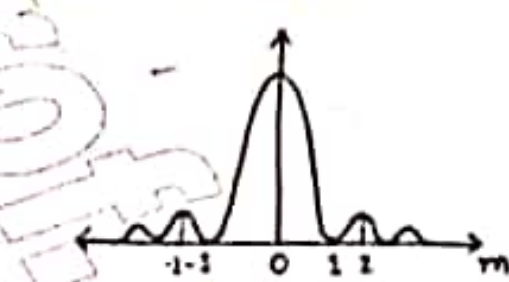


Photoelectric Effect

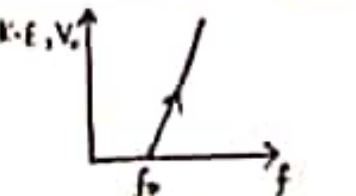


GAS LAWS


BOYLE'S LAW

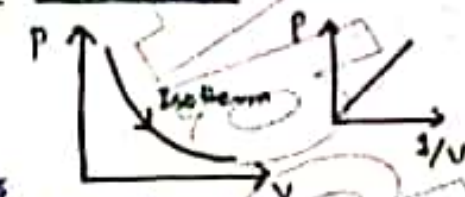


Charles's Law




Pressure Law




Energy cons. in SHM

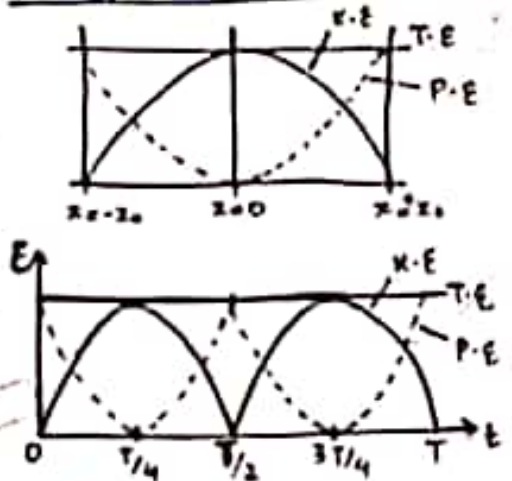


Different intensities

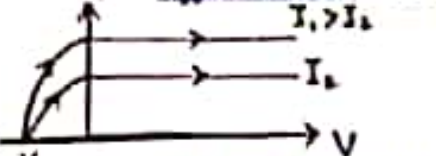


Different frequencies

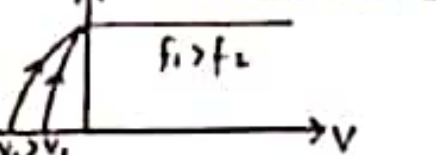


Mass defect Δm

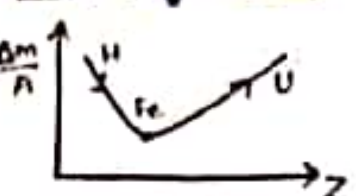


Binding Energy B.E

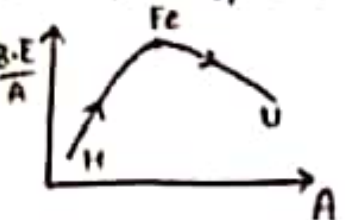

Damping

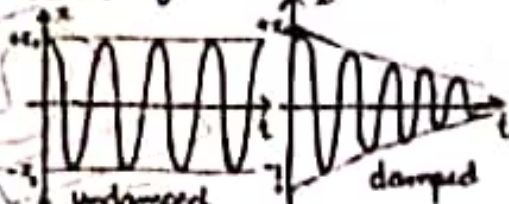

Resonance Curve

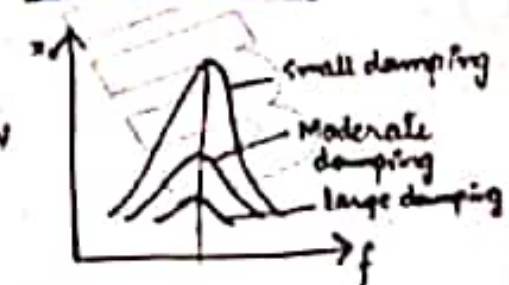

Resonance & Sharpness of resonance ∝ 1/Damping

Snell's Law

$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$

Critical angle

$$\angle C = \sin^{-1} \left(\frac{n_2}{n_1} \right) \text{ if } n_1 > n_2$$

$$\angle C = \sin^{-1} \left(\frac{n_1}{n_2} \right) \text{ if } n_1 < n_2$$

$$\angle C = \sin^{-1} \left(\frac{1}{n} \right) \text{ if } n_1 = \text{air}$$

Refractive Index

$$n = \frac{c}{v} = \frac{\lambda}{\lambda'} = \frac{\text{Real depth}}{\text{Apparent depth}}$$

$$n = \frac{\sin i}{\sin r} \therefore E \rightarrow D$$

$$n = \frac{\sin \angle A}{\sin \angle i} \therefore D \rightarrow R$$

Pressure of Gas

$$P = \frac{1}{3} \rho \langle v^2 \rangle$$

$$P = \frac{2}{3} \frac{N}{V} \left(\frac{1}{2} m v^2 \right)$$

$$P = \frac{2}{3} N_0 \langle K \cdot E \rangle$$

Temperature

$$T = \frac{2}{3k} \left(\frac{1}{2} m v^2 \right)$$

$$T = \frac{2}{3k} \langle K \cdot E \rangle \therefore k = \frac{R}{N_0}$$

RMS Velocity

$$\langle v \rangle = \sqrt{\frac{3P}{\rho}} = \sqrt{\frac{3RT}{M}} = \sqrt{\frac{3kT}{m}}$$

$$\langle v_{rms} \rangle = \sqrt{\frac{v_1^2 + v_2^2 + \dots + v_n^2}{n}}$$

$$\frac{\langle v \rangle}{\langle v_{rms} \rangle} = \sqrt{\frac{T_1}{T_2}} = \sqrt{\frac{M_2}{M_1}}$$

1st Law of Thermodynamics

$$Q = W + \Delta U$$

2nd Law

$$Q_1 = W + Q_2$$

$$\text{Efficiency } \eta = \frac{W}{Q_1} = 1 - \frac{Q_2}{Q_1}$$

$$\eta = 1 - \frac{T_2}{T_1} = \frac{\Delta T}{T_1}$$

Molar Specific Heat

$$C = \frac{Q}{n \Delta T} \cdot Q_p = W + \Delta U$$

$$C_p - C_v = R$$

$$\gamma = C_p / C_v$$

$$v_{rms} = \sqrt{\frac{v_1^2 + v_2^2 + \dots + v_n^2}{n}}$$

Coulomb's Force

$$F_e = k \frac{q_1 q_2}{r^2} = \frac{1}{4\pi \epsilon_0} \frac{q_1 q_2}{r^2}$$

Electric Field Intensity

$$E = F_e / q$$

$$E = kq / r^2$$

$$E = -\Delta V / d$$

$$E = \frac{\sigma}{\epsilon_0}$$

$$E = \frac{\sigma}{2\epsilon_0}$$

$$E = \frac{mg}{q}$$

$$E = \frac{\phi_e}{A}$$

$$E = \frac{\phi_e}{A}$$

$$E = \frac{\phi_e}{A}$$

Electrical potential

$$V = \frac{W}{q} = \frac{U}{q}$$

$$V = kq / r$$

Electric pot. diff.

$$\Delta V = \frac{W}{q} = \frac{U}{q}$$

$$\Delta V = -Ed$$

Electric flux

$$\phi_e = \vec{E} \cdot \vec{A} = EA \cos \theta$$

Capacitance

$$C = \frac{Q}{V} = \frac{\epsilon_0 A}{d}$$

Energy stored in C

$$U = \frac{1}{2} QV = \frac{1}{2} CV^2$$

$$U = \frac{1}{2} \frac{Q^2}{C}$$

$$U = \frac{1}{2} \epsilon_0 E^2 Ad$$

$$U = \frac{1}{2} \frac{\sigma^2}{\epsilon_0} Ad$$

Charging

$$q = q_0 e^{-t/\tau C}$$

Discharging

$$q = q_0 (1 - e^{-t/\tau C})$$

Gauss Law

$$\oint \vec{E} \cdot d\vec{A} = \frac{Q_{enc}}{\epsilon_0}$$

$$E = \frac{Q}{\epsilon_0 A}$$

Electric Current

$$I = \frac{Q}{t} = \frac{Ne}{t}$$

Ohm's Law

$$V = IR$$

Resistance

$$R = \frac{V}{I} = \frac{\rho l}{A}$$

Conductance

$$G = \frac{1}{R} = \frac{I}{V}$$

Temp. coefficient of resistance

$$\alpha = \frac{R_t - R_0}{R_0 \Delta t} = \frac{S_t - S_0}{S_0 \Delta t}$$

Electromotive force

$$E = U / q$$

$$E = IR + I r$$

$$E = V_e + I r$$

Electric Power

$$P = E / t = VI$$

$$P = I^2 R \rightarrow \text{series}$$

$$P = V^2 / R \rightarrow \text{parallel}$$

Kirchoff's 1st rule

$$\sum I = 0$$

Kirchoff's 2nd rule

$$\sum V = 0$$

Ampere's law

$$\oint \vec{B} \cdot d\vec{l} = \mu_0 I$$

Mag. field inside solenoid

$$B = \mu_0 n I = \mu_0 \frac{N}{l} I$$

Mag. force on current carrying conductor in a mag. field.

$$\vec{F}_m = I (\vec{l} \times \vec{B}) = I l B \sin \theta$$

$$B = F_m / I l$$

Mag force on moving charge in mag field

$$\vec{F}_m = q (\vec{v} \times \vec{B}) = q v B \sin \theta$$

$$B = F_m / q v$$

e/m of an electron

$$\frac{e}{m} = \frac{v}{B r} = \frac{2V}{B^2 r^2} = \frac{2e}{B^2 r}$$

Motional emf

$$E = v B l \sin \theta$$

Magnetic flux

$$\phi = \vec{B} \cdot \vec{A} = B A \cos \theta$$

Faraday's Law

$$E = -N \frac{\Delta \phi}{\Delta t}$$

Self-Induction

$$E = -L \frac{\Delta I}{\Delta t} \Rightarrow L = \frac{-E}{\Delta I / \Delta t}$$

Inductance L

$$L = \mu_0 n^2 A l = \mu_0 \frac{N^2 A}{l}$$

$$L = \frac{N \phi}{I}$$

Transformer

$$\frac{N_s}{N_p} = \frac{V_s}{V_p} = \frac{I_p}{I_s} \left\{ \eta = \frac{I_p V_p}{I_s V_s} \right.$$

Back emf in motors

$$E = V - IR$$

AC Generators

$$E = N \omega A B \sin \theta$$

$$E = E_0 \sin \theta \therefore E_0 = N \omega A B$$

Instantaneous Alt. Potential

$$V = V_0 \sin \theta = V_0 \sin \omega t$$

$$I = I_0 \sin \theta = I_0 \sin \omega t$$

RMS electric pot. & current

$$V_{rms} = \frac{1}{\sqrt{2}} V_0 = 0.707 V_0$$

$$I_{rms} = \frac{1}{\sqrt{2}} I_0 = 0.707 I_0$$

Peak-to-peak electric pot.

$$V_{pp} = 2V_0 = 2\sqrt{2} V_{rms}$$

$$I_{pp} = 2I_0 = 2\sqrt{2} I_{rms}$$

STRESS

$$\sigma = F/A = \text{mg}/A$$

STRAIN

$$E = \Delta l / l, \epsilon = \Delta V / V, \epsilon = \tan \theta = \Delta a / a$$

Young's Modulus

$$Y = \frac{F/A}{\Delta l / l} = \frac{F l}{\Delta l A}$$


Bulk Modulus

$$K = \frac{F/A}{\Delta V / V} = \frac{F V}{\Delta V A}$$

Shear Modulus

$$G = \frac{F/A}{\gamma} = \frac{F/A}{\tan \theta} = \frac{F/A}{\theta}$$


Capacitor

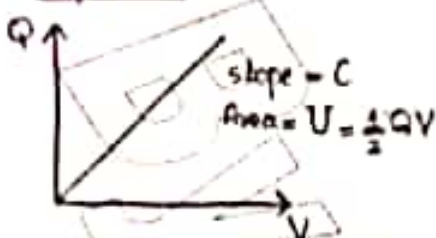



Charging




Discharging



Stress-Strain Diagram




YOSE

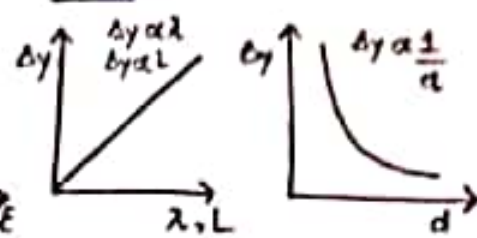


OHM'S LAW



i) Ohmic

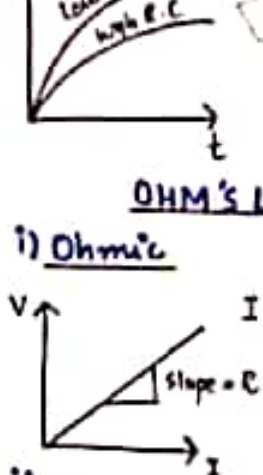

ii) Non-Ohmic




Strain Energy density




Half-life





Diode




Resistivity



X-rays

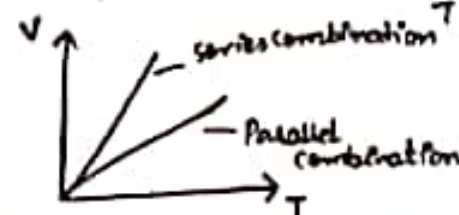

Relative Abundance



Magnetic field Intensity



General Graph (Slopes)




Slope of
 q-t graph = I
 d-t graph = V
 q-V graph = C
 v-t graph = a
 E-t graph = P



$h = 6.63 \times 10^{-34}$
 $\frac{1}{h} = 1.5 \times 10^{33}$
 $hc = 2 \times 10^{25}$
 $\frac{hc}{e} = 1240 \times 10^{-9}$
 $\frac{e}{h} = 240 \times 10^{12}$
 $1eV = 1.6 \times 10^{-19} J$
 $1J = 6.25 \times 10^{18} eV$
 $\sqrt{\frac{2e}{m}} = 6 \times 10^5$

GRAPHS	DISPLACEMENT - TIME GRAPH				VELOCITY - TIME GRAPH		
	Displacement	Slope	Velocity	Acceleration	Velocity	Slope	Acceleration
	const.	0	0	0	const.	0	0
	increasing uniform	uniform +ve	uniform +ve	0	inc. uniformly	uniform +ve	uniform +ve
	inc. non-uniform	inc. non-uniform +ve	inc. non-uniform +ve	+ve $\neq 0$	inc. non-uniformly	dec. non-uniform +ve	dec. non-uniform +ve
	inc. non-uniform	dec. non-uniform +ve	dec. non-uniform +ve	-ve $\neq 0$	inc. non-uniformly	dec. non-uniformly +ve	dec. non-uniformly +ve
	dec. uniform	uniform -ive	uniform -ive	0	dec. uniformly	uniform -ive	uniform -ive
	dec. non-uniform	inc. non-uniform -ive	inc. non-uniform -ive	+ve $\neq 0$	dec. non-uniformly	inc. non-uniform -ive	inc. non-uniform -ive
	dec. non-uniform	dec. non-uniform -ive	dec. non-uniform -ive	-ve $\neq 0$	dec. non-uniformly	dec. non-uniform -ive	dec. non-uniform -ive



WORK




POWER




Momentum - time graph



Electric field Intensity

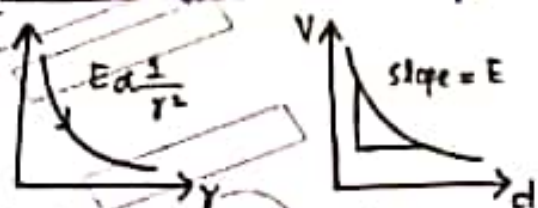

Electric potential diff.

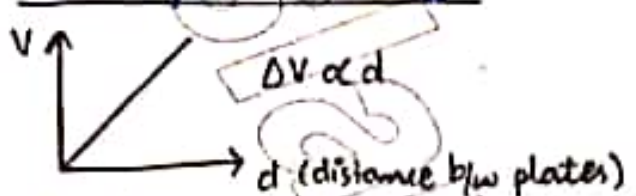

Capacitance C

